

Clean-Cut Flatbed Die Cutter

OPERATION

Set up in under 2 minutes
800+ passes per hour
Easily Understood Controls
Manual / Automatic Modes
Independent Table Delay Controls
Bonded Urethane Cutting Cylinder for
Maximum Die Life

SAMPLING OF PRODUCTS

1500# triple wall; solid fibre
solid & corrugated plastics
blister packs; sandpaper
label laminated products
vinyl; fabrics; upholstery
rubber; cork; leather
laminated foam up to 1" thick
foam core; carpet
large P.O.P. displays
Will Slit Score
Holds Register

SPECIFICATIONS

MAX. DIE SIZE

60" X 90"
80" X 115"
105" X 144"

FLOOR SPACE

89 1/2" X 204"
109" X 254"
133" X 312"

WEIGHT

5000 lbs.
6000 lbs.
7000 lbs.

ELECTRICAL REQUIREMENTS


For 60" & 80" Machines:
440 volts 15 amp 3 phase 60HZ
220 volts 30 amp 3 phase 60HZ
For 100" Machine:
440 volts 20 amp 3 phase 60HZ
220 volts 35 amp 3 phase 60HZ

Maximum 4" opening
1 year warranty

50HZ available on request

SAFETY

Meets OSHA Guarding Standards
Refer to OSHA Letter
Positive Lock Emergency Stop Buttons
Shielded Start/Run Buttons
Lock Out/Tag Out Point
Light Curtain Emergency Shut Off

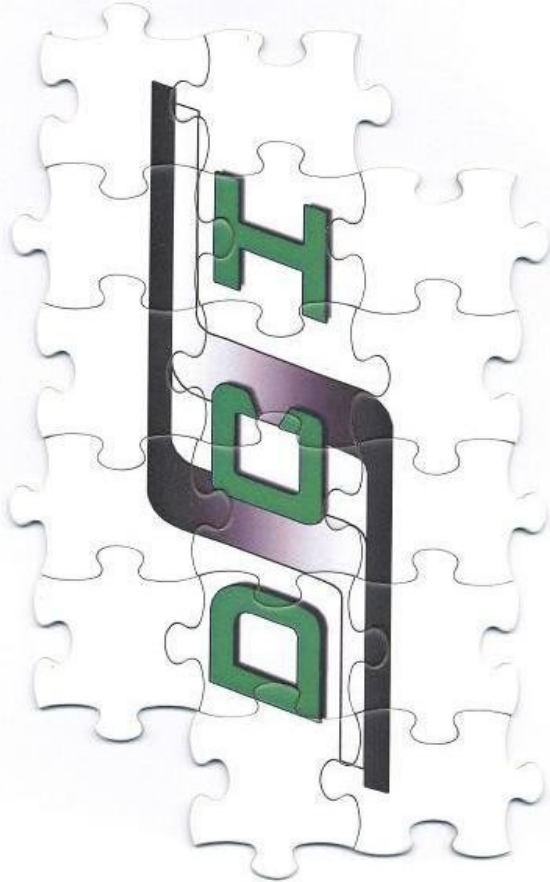


Die Cutters, Inc.

306 S. Chestnut St.
PO Box 1686
Centralia, IL 62801
www.diecuttersinc.com

Toll Free: 877-734-3288
Phone: 618-532-3448
Fax: 618-532-3447
sales@diecuttersinc.com

CLEEN-CUT FLATBED DIE CUTTER

Meets OSHA
Guarding
Requirements

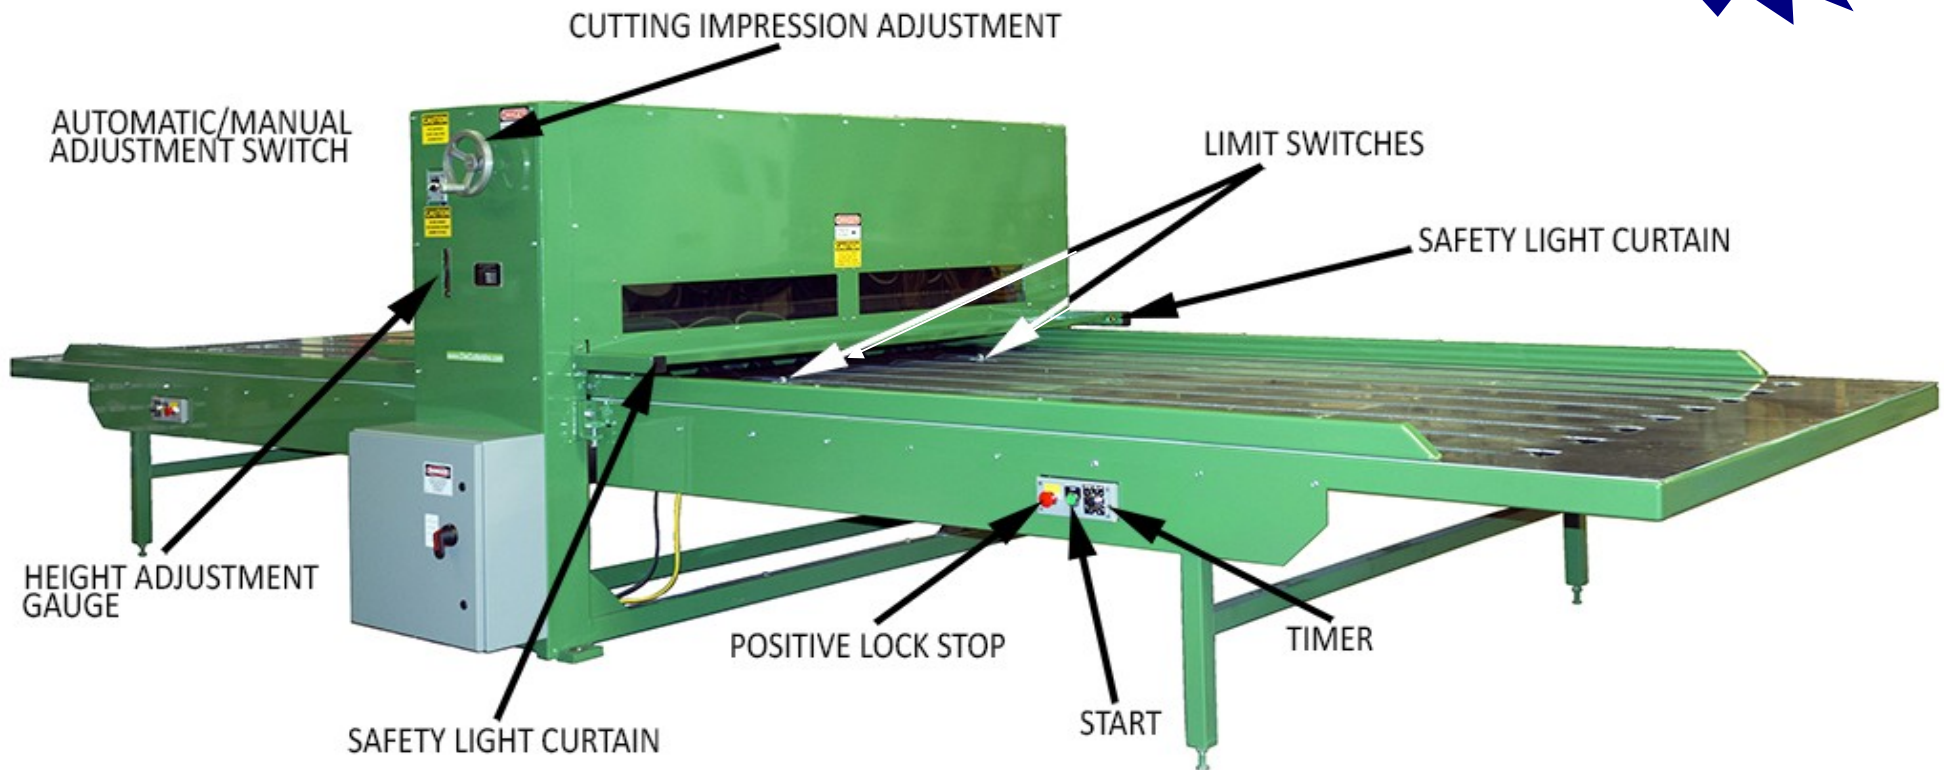

Die Cutters, Inc.
306 S. Chestnut St.
PO Box 1686
Centralia, IL 62801
www.diecuttersinc.com



Toll Free: 877-734-3288
Phone: 618-532-3448
Fax: 618-532-3447
sales@diecuttersinc.com